


1 -STIK FLAT



MANUFACTURER	KEY AUTOMATION	KEY AUTOMATION
MODEL	STIK, FLAT, VERTICAL	TOWER
CODE	KSTIKDW, KSTIKDB, KSTIKUW, KSTIKUB, KSTIKFW, KSTIKFB, KSTIKVW, KSTIKVB	KSTIKTW, KSTIKTB
TYPE	OUTDOOR PATHWAY POST	OUTDOOR PATHWAY POST
LED CIRCUIT	50mA Constant Current	100mA Constant Current
LED LIFE	30000H	30000H
LED COLOUR	4400K (4600-4250)	4400K (4600-4250)
LED BRAND	REFOND	REFOND
POWER SUPPLY	24 - 35Vdc	24 - 35Vdc
LUMINOUS FLUX	132lm	264lm
ABSORBED POWER	2W (50mA@32Vdc)	4W (100mA@32Vdc)
LIGHTING EFFICIENCY	82,5lm/W	82,5lm/W
COLOUR RENDERING INDEX	CRI > 70	CRI > 70
TRANSFORMER	EXTERNAL	EXTERNAL
INGRESS PROTECTION	IP54	IP54
WORKING RANGE	-20 + 55°C	-20 + 55°C

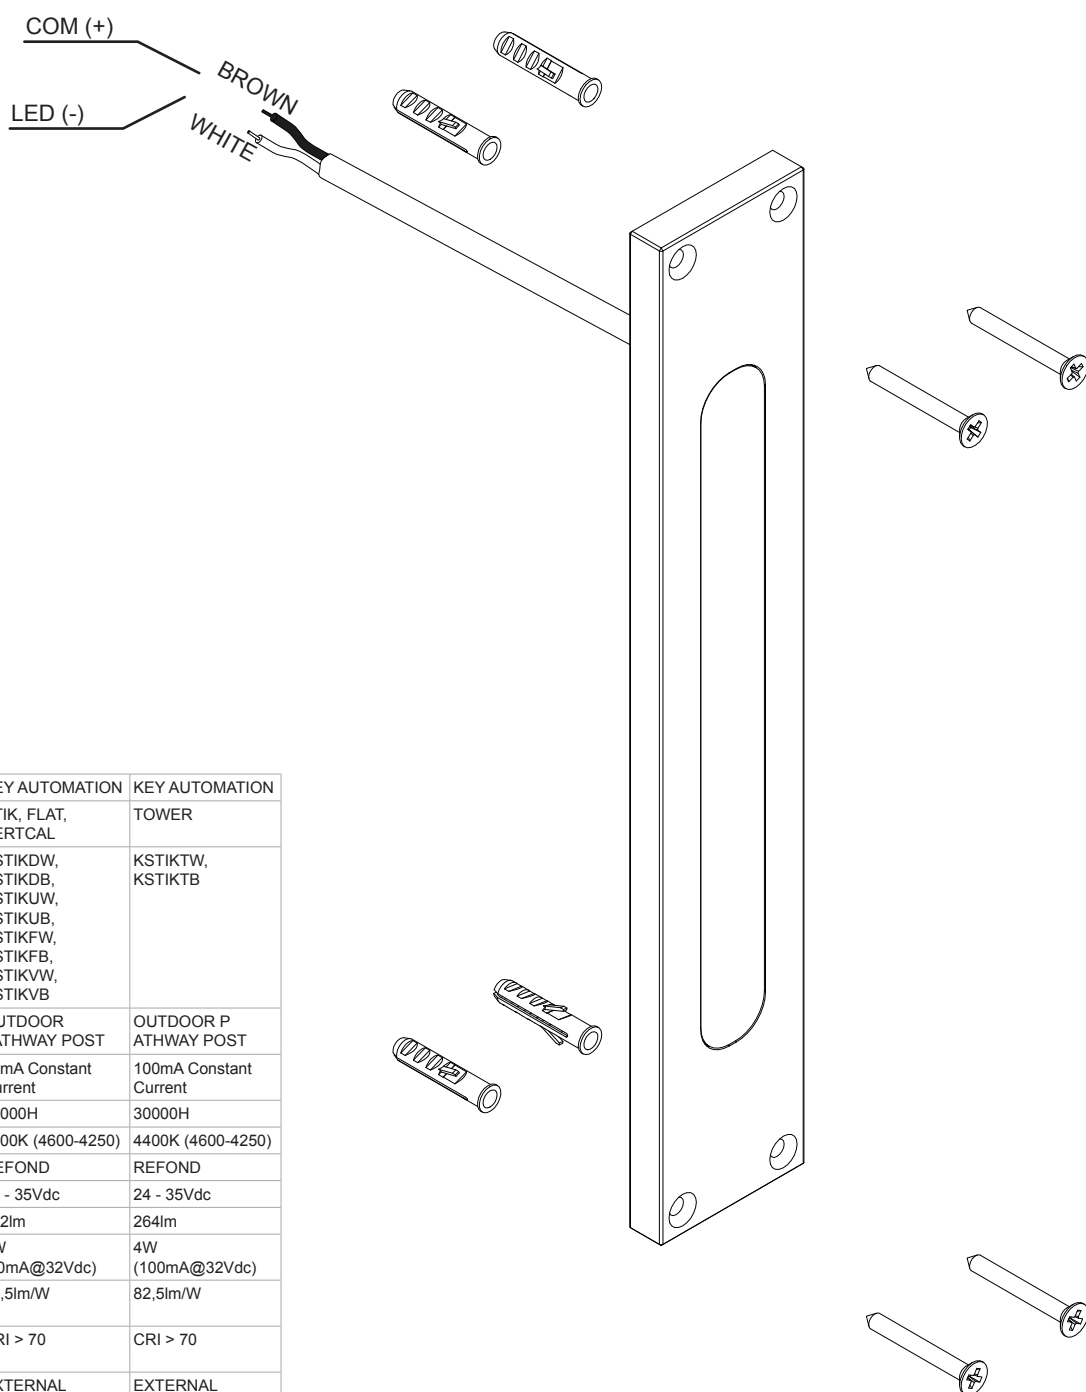